

Lead Free Ca Zn Based Stabilizer

Technical index

Type	Pipe	Profile	Wire or cable	Foam board	Fitting	Transparent PVC
Item	WSD801	WSD802	WSD803	WSD804	WSD805	WSD806
Apperance	White Powder					
Ca/Zn Content, %	2.5-8					
Melting Point, °C	80-105					
Heating Loss, %	1.5 max					
Reference dosage	2.5-3.5	4.0-5.0	4.5-5.5	5.0-6.0	5.0-5.5	1.5-3.0

Applications:

It mainly used as PVC heat stabilizer for soft/semi rigid ,rigid applications Like PVC film,sheet, shoes, profile, pipe, wire,hose, plastic injection and extrusion materials etc.

Packing:


25Kg/bag; Woven bags with PE lined;

Storage:

Stored in dry and ventilated condition



SCAN FOR
WHATSAPP

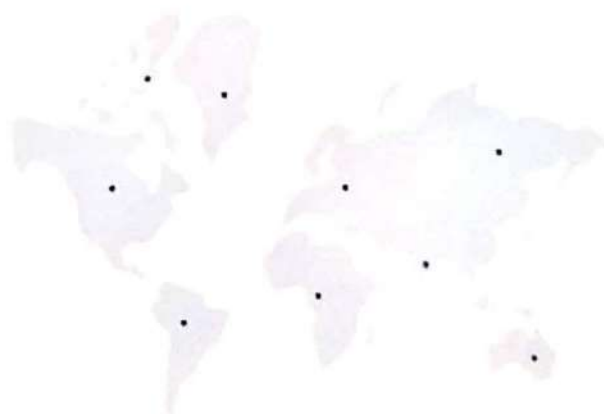

www.atulchemical.co.in